




SPEED VS TORQUE, CURRENT CURVE

SPEC. :	20	HP	4	P	60	HZ	TYPE :	TEFC	
VOLTAGE	220/380			(V)			RATED TORQUE :	8.3	Kg _f ·m
RATED CURRENT :	52.1/30.2			(A)			RATED SPEED :	1760	RPM

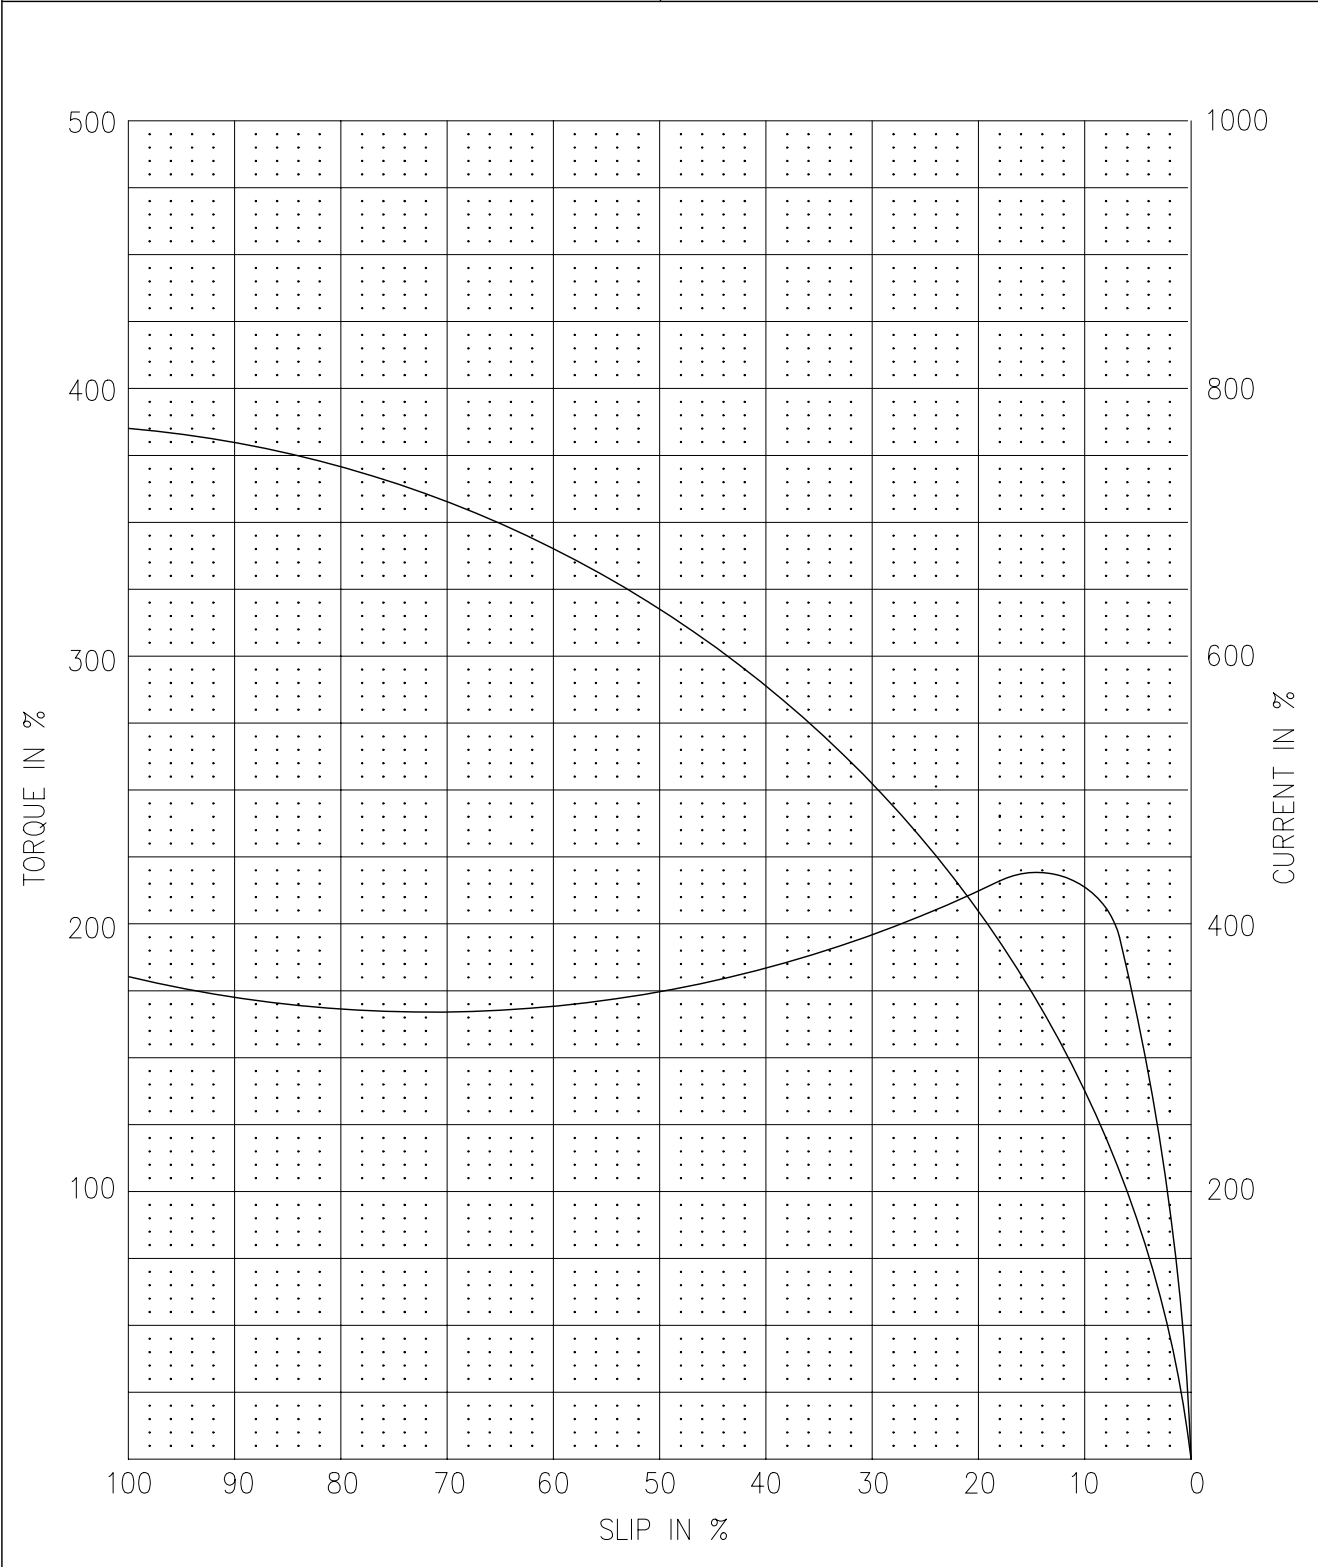

DWG NO.	ST-KMI-20HK1	PREPARED	CHECKED	APPROVED
Otis Elevator Korea		2006.05.22 B.K.KIM	2006.05.22 J.S.PARK	2006.05.22 H.T.KIM